5U Hinged Security Lock Panel

Product Diagram (RKSECLK5U)
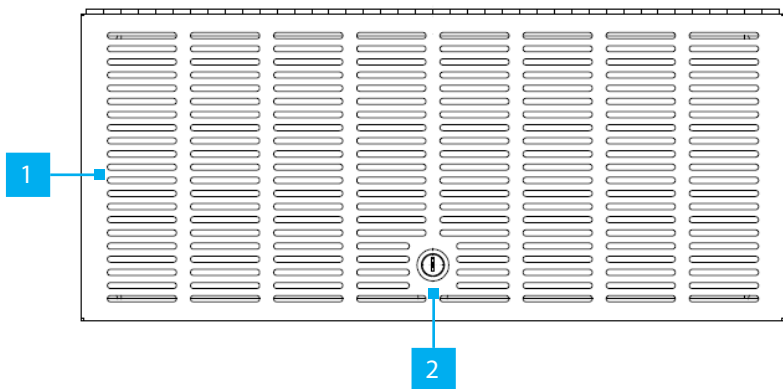
Component	Function
1 Hinged Security Panel	• Used to access the device within the **Rack**.
2 Lock	• Used to secure the device within the **Rack**.

Requirements

For the latest requirements, please visit www.startech.com/RKSECLK5U

• Cage Nut Tool x 1(Optional)
• Phillips Head Screwdriver x 1

Package Contents

• Hinged Security Lock Panel x 1
• M5 Screws x 4
• Cage Nuts x 4
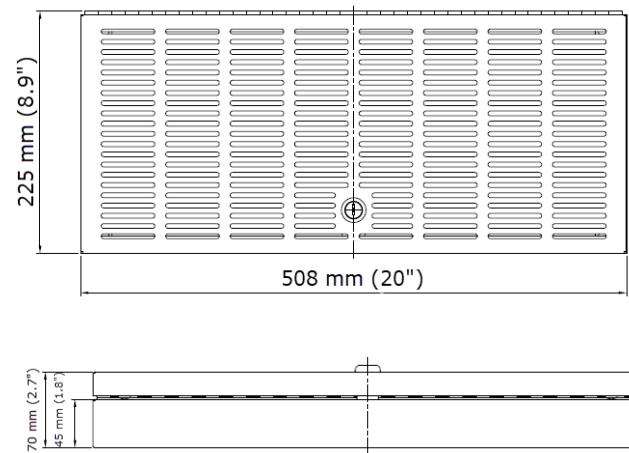• Keys x 2
• Quick-Start Guide x 1

Installation

Notes: *Make sure that there are empty* **Cage Nut Holes** *on the* **Rack's Rails***, above and below the* **Device** *that you wish to secure.*

The **Hinged Security Panel** *is meant to be used to secure 4U height equipment and will render the rack unit above and below the protected device unusable.*
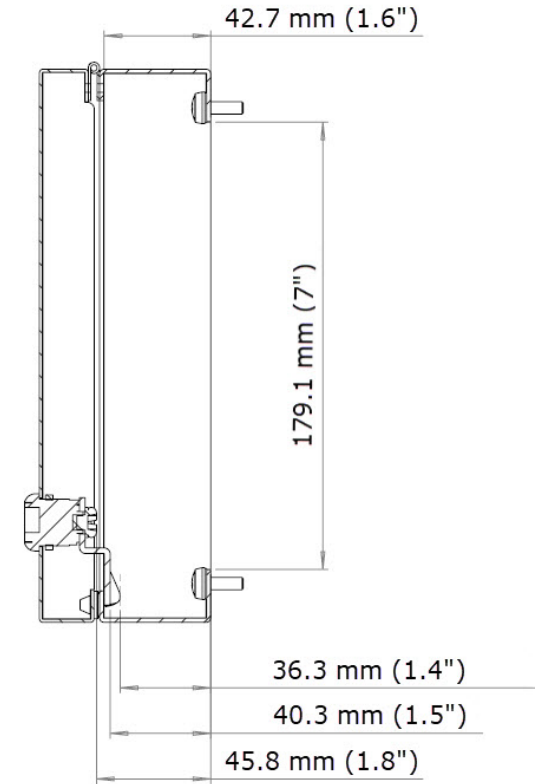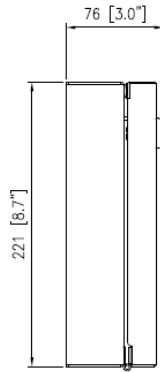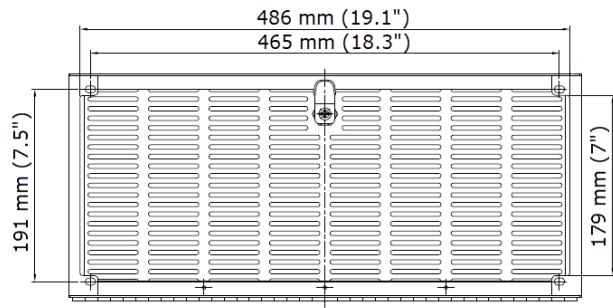
1. Locate the **Device** within a **Rack** that you would like to secure.

2. Insert the **M5 Cage Nuts** (x 4) into the **Cage Nut Holes** on the **Rack's Rails** above and below the device.

   Note: *A* **Cage Nut Tool** *can be used to help insert the* **Cage Nuts**.

3. Align the **Cage Nut Holes** on the **Hinged Security Panel**, with the **M5 Cage Nuts** on the **Rack's Rail**.

4. Insert the **M5 Screws** (x 4) through the **Cage Nut Holes** and into the **Cage Nuts**.

5. Using a **Phillips Head Screwdriver**, tighten the **M5 Screws**.

6. When the **Hinged Security Panel** is installed, use the **Key** (included) to unlock and lock the **Lock**, securing the **Device**.

Product Dimensions

225 mm (8.9")

508 mm (20")

70 mm (2.7") 45 mm (1.8")

Lock Dimensions

486 mm (19.1")
465 mm (18.3")
191 mm (7.5")
179 mm (7")

76 [3.0"]
221 [8.7"]

42.7 mm (1.6")
179.1 mm (7")
36.3 mm (1.4")
40.3 mm (1.5")
45.8 mm (1.8")